


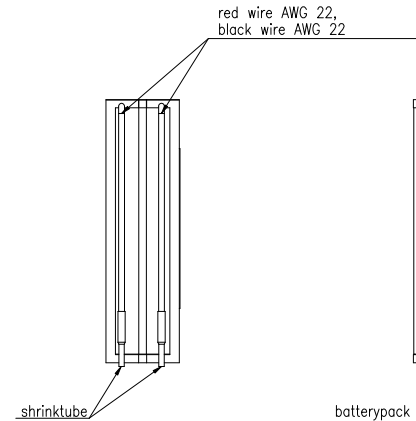

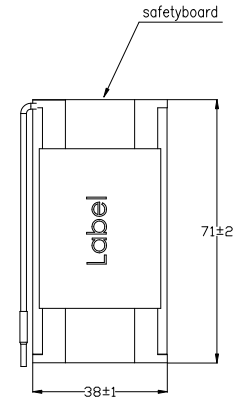



The supplier acknowledges that, with this acceptance of the drawing, he is in a position to manufacture the illustrated part in accordance with the drawing to reproduce the dimensions of the components. The drawing is not a technical drawing. The drawing is not a technical drawing. The drawing is not a technical drawing. The drawing is not a technical drawing.

- Technische Daten/
technical data : Akkupack/
battery pack
- Chemie/
chemistry : Li-Ion
- Zellenzahl/
no. of cells : 2 Zellen/ cells 18650 Samsung SDI 26H
- Kapazität/
capacity : nom. 2600mAh discharge at 0.2C
min. 2550mAh discharge at 0.2C

ta:20°C; EV(Discharge End Voltage): 2.75V per cell
- Innenwiderstand/
impedance : < 120mOhm (battery and safetyboard)
- Nominalspannung/
nominal voltage : 7.4V
- Standard Ladespannung/
standard charge voltage : 8.4V±1%
- Standard Entladespannung/
standard discharge voltage : 5.5V
- Nominaler Ladestrom/
nominal charge current : 0.5C
- Maximaler Ladestrom/
maximum charge current : 1C
- Ladeendstrom/
charge end current : 0.01C recommended
- Maximaler Entladestrom/
maximum discharge current : 2C
- Anwendungstemperaturbereich/
ambient temperature range : 0°C...+45°C charge
-20°C...+60°C discharge
-20°C...+30°C storage max. 1 year
-20°C...+45°C storage max. 3months
- Selbstentladung/
self discharge : ≤ 5% / month at 20°C
≤ 10% / month at 30°C
≤ 20% / month at 40°C
- Standards/ : UN 3480, Subsection 38.3
All cells and battery packs type tested according
to UN manual of test and criteria subsection 38.3



- Technische Daten/
technical data : Sicherheitsschaltung/
safety board
- Überladeschutzspannung/
over charge voltage detection : 4.3V±25mV per cell
- Wiedereinschaltspannung/
over charge release voltage : 4.1V±50mV per cell
- Entladeabschaltspannung/
over discharge detection voltage : 2.4V±50mV per cell
- Wiedereinschaltspannung/
over discharge release voltage : 3V±100mV per cell
- Nominaler Lade/Entladestrom/
nominal operating current : 5A
- Entlade Abschaltstrom/
discharge cut off current : 13A± 3A
- Kurzschlusschutz/
short circuit protection : gegen äußeren Kurzschluss/
against external short circuit
- Temperaturschalter/
temperature switch : ---
- MOSFET : in Masse
in Gnd
- Rückstellkriterium/
release condition : Last trennen, Aktiv nach Anladen/
cut load, release after charging up
- Nettogewicht/
net weight : ca./ approx. 100g
- Leiterplattenmaterial/
pcb material : FR4
- Standards : CE

Verwendungsbereich/Application range für Anfrage/for inquiry AN-IS-2013-00129		Zul. Abweichung/ Allowable deviation	Oberfläche/ Surface	Maßstab/Scale (DIN A2): 1:1	Gewicht/Weight
		Atollgometoleranz DIN ISO 2768-m		Werkstoff/Work material, Modell-Nr.	
	2013	Datum/Date	Name	Zeichnungsname/Drawing name	
	Erstellt/ Drawn by	17.05.	JE	Li-Ion Battery 7.4V 2600mAh with safetyboard	
VO ---		XX.XX.XX	XX	Zeichnungsnummer/Drawing number Artikelnummer/Part number	
		ANSMANN		2447-3030	
Version	Änderung/Change	Datum/Date	Name	Ursprung/Origin Proj. IS-2013-00129	Ersatz für/Replaced by
					Ersatz durch/Replacement through
					Blatt/ Sheet
					1